



LiuGong Machinery Europe B.V

P.J.Oudweg 4

1314 CH Almere

The Netherlands

T: +31 611151832

E: overseas@liugong.com

www.liugong-europe.com

Like and follow us:



LG FL-122018-ENG-EU

The LiuGong series of logos herein, including but not limited to word marks, device marks, letter of alphabet marks and combination marks, as the registered trademarks of Guangxi LiuGong Group Co., Ltd. are used by Guangxi LiuGong Machinery Co., Ltd. with legal permission, and shall not be used without permission. Specifications and designs are subject to change without notice. Illustrations and pictures may include optional equipment and may not include all standard equipment. Equipment and options varies by regional availability.

CPCD15-35

FORKLIFTS




TOUGH WORLD. TOUGH EQUIPMENT.

MAXIMIZE YOUR RETURN ON INVESTMENT

LiuGong's **customer-driven** design and **quality-focused** engineering creates lasting value that will deliver to your bottom line.


DEPENDABLE POWER

Unmatched performance driven by the World-Class Engine.



ERGONOMIC

Widen operating space and reasonable design can give the operator better experience.

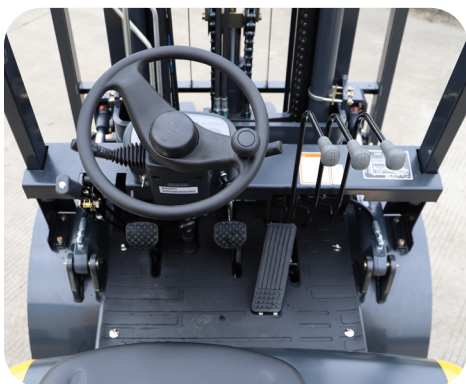

COMFORTABLE

The full hydraulic steering system allows for smooth steering in an ergonomic seating posture, hence improved operator's comfort.



HIGH EFFICIENCY

Newly optimized hydraulic system provides excellent lifting speed, assisting you to finish work efficiently and safely.

GOOD VIEW

The mast and overhead guard are designed for wider view, as well as operator's comfort and safety.



MAINTAINING

The engine hood with big angle for easy to maintain.



PARTS



Using genuine LiuGong parts is key to keeping your costs low and your machine in top working order. Our extensive support network is always there when you need it, to maximize your business profitability.

AFTER SALES SERVICE

As a customer of LiuGong you can feel confident that our dealers and regional offices will be there to support you with training, service and maintenance needed throughout the life of your machine.



SPECIFICATION

General	Model	1			CPCD15	CPCD15
	Power Type	2			Diesel	GAS / LPG
	Base Capacity	3	@rated load center	kg	1,500	1,500
	Load Center	4		mm	500	500
Weights	Service Weight	5	unloaded	kg	2,700	2,700
	Axle Load	6	loaded / unloaded, front	kg	3,680 / 1,030	3,680 / 1,030
		7	loaded / unloaded, rear	kg	520 / 1,670	520 / 1,670
Tires	Tire Type	8			Pneumatic	Pneumatic
	Wheels	9	front / rear		2 / 2	2 / 2
	Wheelbase	10		mm	1,430	1,430
	Tire Size	11	front		6.50-10-10PR	6.50-10-10PR
		12	rear		5.00-8-8PR	5.00-8-8PR
	Tread Width	13	front / rear		890 / 910	890 / 910
Mast	Max. Fork Height	14	with std 2-stage mast	mm	3,000	3,000
	Free lift	15	with std 2-stage mast	mm	130	130
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,040	2,040
	Height, Upright Extended	17	with std 2-stage mast	mm	4,030	4,030
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°	6° / 12°
	Carriage	19	width	mm	970	970
	Fork Spread	20	minimum / maximum	mm	202 / 970	202 / 970
	Fork Dimensions	21	T x W x L	mm	35x 100 x 920	35x 100 x 920
Chassis	Length to Fork Face	22	with std 2-stage mast	mm	2,330	2,330
	Overall Width	23		mm	1,080	1,080
	Overhead Guard Height	24		mm	2,070	2,070
	Turning Radius	25	minimum outside	mm	1,950	1,950
	Fork Overhang	26	with std 2-stage mast	mm	433	433
	Right Angle Stack	27	add load length and clearance	mm	3,490	3,490
	Ground Clearance	28	minimum loaded	mm	90	90
		29	center of wheelbase	mm	130	130
Performance	Travel Speed	30	loaded / unloaded	km/h	15 / 15	15 / 15
	Lift Speed	31	loaded / unloaded	m/s	0.53 / 0.55	0.53 / 0.55
	Lower Speed	32	loaded / unloaded	m/s	0.50 / 0.45	0.50 / 0.45
	Max. Drawbar Pull	33	loaded	kg	1,700	1,800
	Max. Gradeability	34	loaded / unloaded	%	20 / 20	20 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Yanmar
		38	model		NC485BPG-2	4TNE92-HRJ
		39	emission compliance		CHN Stage II	EU Stage IIIA
		40	cylinders		4	4
	Engine	41	displacement	liters	2.27	2.659
		42	rated power	kW/rpm	30 / 2,600	32.8 / 2,450
		43	Max. torque	N · m/rpm	131 / 1,900	140 / 1,700
						142.7 / 1,600

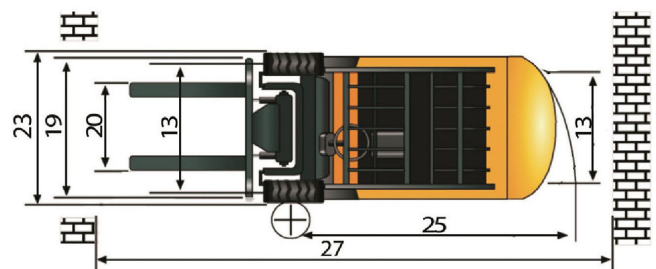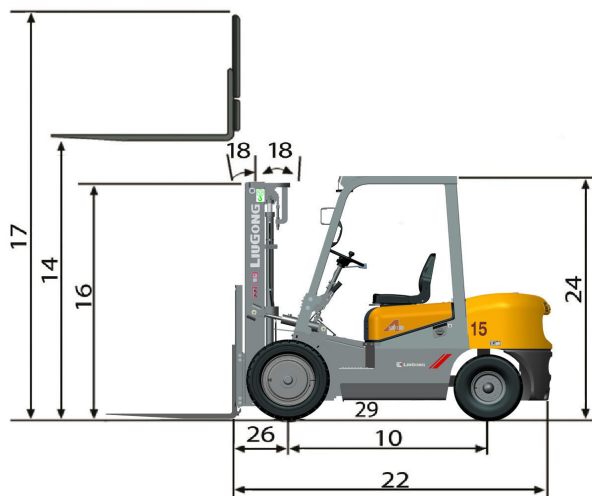



SPECIFICATION

General	Model	1			CPCD18	CPCD18
	Power Type	2			Diesel	GAS/LPG
	Base Capacity	3	@rated load center	kg	1,800	1,800
	Load Center	4		mm	500	500
Weights	Service Weight	5	unloaded	kg	2,920	2,920
	Axle Load	6	loaded / unloaded, front	kg	4,130 / 1,000	4,130 / 1,000
		7	loaded / unloaded, rear	kg	590 / 1,920	590 / 1,920
Tires	Tire Type	8			Pneumatic	Pneumatic
	Wheels	9	front / rear		2 / 2	2 / 2
	Wheelbase	10		mm	1,430	1,430
	Tire Size	11	front		6.50-10-10PR	6.50-10-10PR
		12	rear		5.00-8-8PR	5.00-8-8PR
Mast	Tread Width	13	front / rear		890 / 910	890 / 910
	Max. Fork Height	14	with std 2-stage mast	mm	3,000	3,000
	Free lift	15	with std 2-stage mast	mm	130	130
	Height, Upright Lowered	16	with std 2-stage mast	mm	2,040	2,040
	Height, Upright Extended	17	with std 2-stage mast	mm	4,030	4,030
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg	6° / 12°	6° / 12°
	Carriage	19	width	mm	970	970
	Fork Spread	20	minimum / maximum	mm	202 / 970	202 / 970
	Fork Dimensions	21	T x W x L	mm	35x 100 x 920	35x 100 x 920
	Length to Fork Face	22	with std 2-stage mast	mm	2,370	2,370
Chassis	Overall Width	23		mm	1,080	1,080
	Overhead Guard Height	24		mm	2,070	2,070
	Turning Radius	25	minimum outside	mm	1,990	1,990
	Fork Overhang	26	with std 2-stage mast	mm	433	433
	Right Angle Stack	27	add load length and clearance	mm	3,550	3,550
	Ground Clearance	28	minimum loaded	mm	90	90
		29	center of wheelbase	mm	130	130
Performance	Travel Speed	30	loaded / unloaded	km/h	15 / 15	15 / 15
	Lift Speed	31	loaded / unloaded	m/s	0.53 / 0.55	0.53 / 0.55
	Lower Speed	32	loaded / unloaded	m/s	0.50 / 0.45	0.50 / 0.45
	Max. Drawbar Pull	33	loaded	kg	1,700	1,800
	Max. Gradeability	34	loaded / unloaded	%	20 / 20	20 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Yanmar
		38	model		NC485BPG-2	4TNE92-HRJ
		39	emission compliance		CHN Stage II	EU Stage IIIA
		40	cylinders		4	4
		41	displacement	liters	2.27	2.659
		42	rated power	kW/rpm	30 / 2,600	32.8 / 2,450
		43	Max. torque	N · m/rpm	131 / 1,900	140 / 1,700
					140 / 1,700	142.7 / 1,600

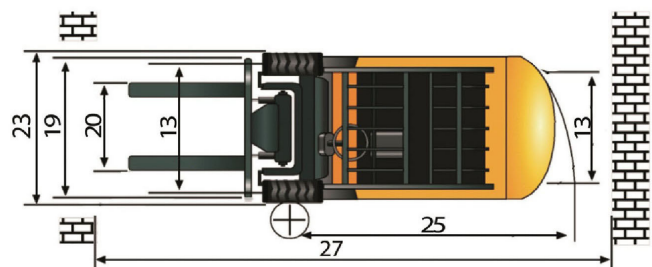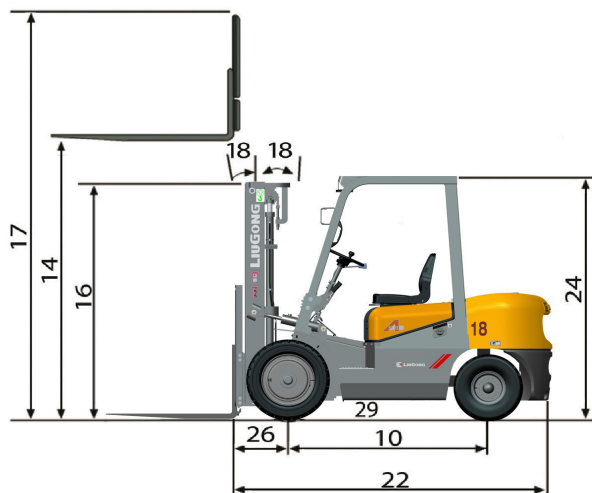



SPECIFICATION

General	Model	1				CPCD20	CPCD20
	Power Type	2				Diesel	GAS/LPG
	Base Capacity	3	@rated load center	kg		2,000	2,000
	Load Center	4		mm		500	500
Weights	Service Weight	5	unloaded	kg		3,355	3,355
	Axle Load	6	loaded / unloaded, front	kg		4,675 / 1,465	4,675 / 1,465
		7	loaded / unloaded, rear	kg		680 / 1,890	680 / 1,890
Tires	Tire Type	8				Pneumatic	Pneumatic
	Wheels	9	front / rear			2 / 2	2 / 2
	Wheelbase	10		mm		1,650	1,650
	Tire Size	11	front			7.00-12-12PR	7.00-12-12PR
		12	rear			6.00-9-10PR	6.00-9-10PR
	Tread Width	13	front / rear			960 / 970	960 / 970
Mast	Max. Fork Height	14	with std 2-stage mast	mm		3,000	3,000
	Free lift	15	with std 2-stage mast	mm		140	140
	Height, Upright Lowered	16	with std 2-stage mast	mm		2,040	2,040
	Height, Upright Extended	17	with std 2-stage mast	mm		4,025	4,025
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg		6° / 12°	6° / 12°
	Carriage	19	width	mm		1,040	1,040
	Fork Spread	20	minimum / maximum	mm		244 / 1,032	244 / 1,032
	Fork Dimensions	21	T x W x L	mm		40 x 100 x 1,070	40 x 100 x 1,070
Chassis	Length to Fork Face	22	with std 2-stage mast	mm		2,550	2,550
	Overall Width	23		mm		1,150	1,150
	Overhead Guard Height	24		mm		2,100	2,100
	Turning Radius	25	minimum outside	mm		2,200	2,200
	Fork Overhang	26	with std 2-stage mast	mm		465	465
	Right Angle Stack	27	add load length and clearance	mm		3,935	3,935
	Ground Clearance	28	minimum loaded	mm		110	110
		29	center of wheelbase	mm		120	120
Performance	Travel Speed	30	loaded / unloaded	km/h	19 / 20	19 / 20	19 / 20
	Lift Speed	31	loaded / unloaded	m/s	0.53 / 0.55	0.53 / 0.55	0.53 / 0.55
	Lower Speed	32	loaded / unloaded	m/s	0.53 / 0.50	0.53 / 0.50	0.53 / 0.50
	Max. Drawbar Pull	33	loaded	kg	2,000	1,680	1,680
	Max. Gradeability	34	loaded / unloaded	%	20 / 20	18 / 20	18 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Yanmar	Mitsubishi
		38	model		A498BT1	4TNE92-HRJ	S4S
		39	emission compliance		EU Stage IIIA	EU Stage IIIA	EU Stage IIIA
		40	cylinders		4	4	4
		41	displacement	liters	3.17	2.659	3.331
		42	rated power	kW/rpm	36.8 / 2,400	32.8 / 2,450	35.3 / 2,250
		43	Max. torque	N · m/rpm	186 / 1,800	140 / 1,700	177 / 1,700
							176.5 / 1,600

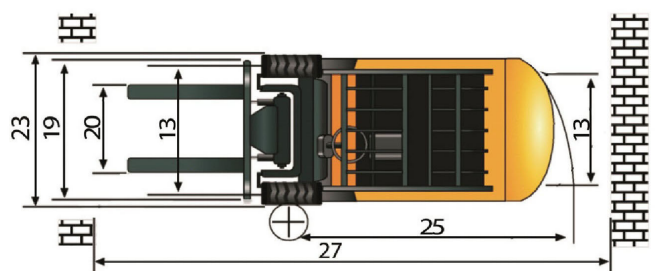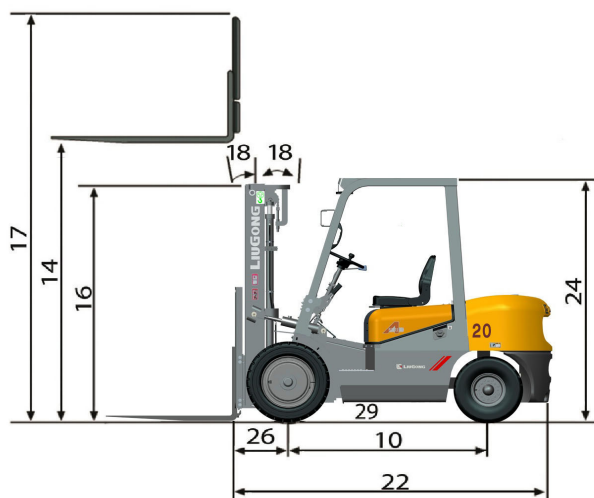



SPECIFICATION

General	Model	1				CPCD25	CPCD25
	Power Type	2				Diesel	GAS/LPG
	Base Capacity	3	@rated load center	kg		2,500	2,500
	Load Center	4		mm		500	500
Weights	Service Weight	5	unloaded	kg		3,555	3,555
	Axle Load	6	loaded / unloaded, front	kg		5,295 / 1,355	5,295 / 1,355
		7	loaded / unloaded, rear	kg		760 / 2,200	760 / 2,200
Tires	Tire Type	8				Pneumatic	Pneumatic
	Wheels	9	front / rear			2 / 2	2 / 2
	Wheelbase	10		mm		1,650	1,650
	Tire Size	11	front			7.00-12-12PR	7.00-12-12PR
		12	rear			6.00-9-10PR	6.00-9-10PR
	Tread Width	13	front / rear			960 / 970	960 / 970
Mast	Max. Fork Height	14	with std 2-stage mast	mm		3,000	3,000
	Free lift	15	with std 2-stage mast	mm		145	145
	Height, Upright Lowered	16	with std 2-stage mast	mm		2,040	2,040
	Height, Upright Extended	17	with std 2-stage mast	mm		4,025	4,025
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg		6° / 12°	6° / 12°
	Carriage	19	width	mm		1,040	1,040
	Fork Spread	20	minimum / maximum	mm		244 / 1,032	244 / 1,032
	Fork Dimensions	21	T x W x L	mm		45 x 100 x 1,070	45 x 100 x 1,070
	Length to Fork Face	22	with std 2-stage mast	mm		2,590	2,590
	Overall Width	23		mm		1,150	1,150
Chassis	Overhead Guard Height	24		mm		2,100	2,100
	Turning Radius	25	minimum outside	mm		2,285	2,285
	Fork Overhang	26	with std 2-stage mast	mm		465	465
	Right Angle Stack	27	add load length and clearance	mm		4,015	4,015
	Ground Clearance	28	minimum loaded	mm		110	110
		29	center of wheelbase	mm		120	120
	Travel Speed	30	loaded / unloaded	km/h	19 / 20	19 / 20	19 / 20
	Lift Speed	31	loaded / unloaded	m/s	0.53 / 0.55	0.53 / 0.55	0.53 / 0.55
Performance	Lower Speed	32	loaded / unloaded	m/s	0.53 / 0.50	0.53 / 0.50	0.53 / 0.50
	Max. Drawbar Pull	33	loaded	kg	2,000	1,680	1,680
	Max. Gradeability	34	loaded / unloaded	%	20 / 20	18 / 20	18 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Yanmar	Mitsubishi
		38	model		A498BT1	4TNE92-HRJ	S4S
		39	emission compliance		EU Stage IIIA	EU Stage IIIA	EU Stage IIIA
		40	cylinders		4	4	4
		41	displacement	liters	3.17	2.659	3.331
		42	rated power	kW/rpm	36.8 / 2,400	32.8 / 2,450	35.3 / 2,250
		43	Max. torque	N · m/rpm	186 / 1,800	140 / 1,700	177 / 1,700

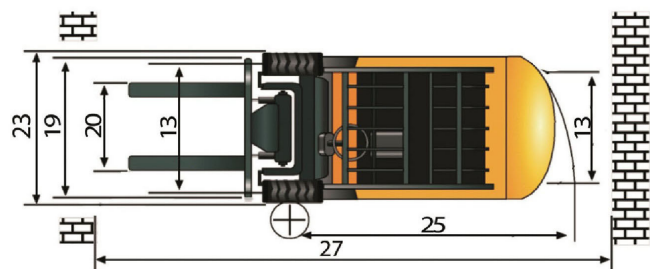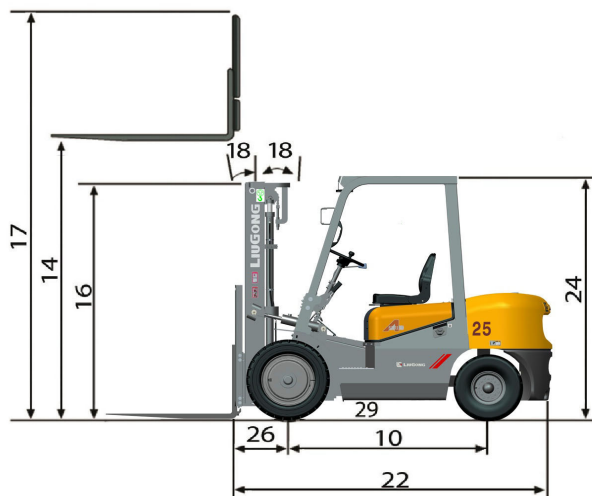



SPECIFICATION

General	Model	1				CPCD30	CPCD30
	Power Type	2				Diesel	GAS/LPG
	Base Capacity	3	@rated load center	kg		3,000	3,000
	Load Center	4		mm		500	500
Weights	Service Weight	5	unloaded	kg		4,230	4,230
	Axle Load	6	loaded / unloaded, front	kg		6,400 / 1,650	6,400 / 1,650
		7	loaded / unloaded, rear	kg		830 / 2,580	830 / 2,580
Tires	Tire Type	8				Pneumatic	Pneumatic
	Wheels	9	front / rear			2 / 2	2 / 2
	Wheelbase	10		mm		1,700	1,700
	Tire Size	11	front			28x9-15-14PR	28x9-15-14PR
		12	rear			6.50-10-10PR	6.50-10-10PR
	Tread Width	13	front / rear			1,000 / 980	1,000 / 980
Mast	Max. Fork Height	14	with std 2-stage mast	mm		3,000	3,000
	Free lift	15	with std 2-stage mast	mm		145	145
	Height, Upright Lowered	16	with std 2-stage mast	mm		2,080	2,080
	Height, Upright Extended	17	with std 2-stage mast	mm		4,146	4,146
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg		6° / 12°	6° / 12°
	Carriage	19	width	mm		1,100	1,100
	Fork Spread	20	minimum / maximum	mm		272 / 1,072	272 / 1,072
	Fork Dimensions	21	T x W x L	mm		45 x 122 x 1,070	45x122x1,070
Chassis	Length to Fork Face	22	with std 2-stage mast	mm		2,705	2,705
	Overall Width	23		mm		1,225	1,225
	Overhead Guard Height	24		mm		2,170	2,170
	Turning Radius	25	minimum outside	mm		2,400	2,400
	Fork Overhang	26	with std 2-stage mast	mm		471	471
	Right Angle Stack	27	add load length and clearance	mm		4,141	4,141
	Ground Clearance	28	minimum loaded	mm		135	135
		29	center of wheelbase	mm		140	140
Performance	Travel Speed	30	loaded / unloaded	km/h	19 / 20	19 / 20	19 / 20
	Lift Speed	31	loaded / unloaded	m/s	0.43 / 0.45	0.43 / 0.45	0.43 / 0.45
	Lower Speed	32	loaded / unloaded	m/s	0.46 / 0.48	0.46 / 0.48	0.46 / 0.48
	Max. Drawbar Pull	33	loaded	kg	2,000	2,000	1,680
	Max. Gradeability	34	loaded / unloaded	%	18 / 20	20 / 20	20 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Cummins	Mitsubishi
		38	model		A498BT1	QSF2.8	S4S
		39	emission compliance		EU Stage IIIA	EU Stage IIIA	EU Stage IIIA
		40	cylinders		4	4	4
		41	displacement	liters	3.17	2.80	3.331
		42	rated power	kW/rpm	36.8 / 2,400	36.5 / 2,500	35.3 / 2,250
		43	Max. torque	N · m/rpm	186 / 1,800	190/1,300~1,500	177 / 1,700
							176.5 / 1,600

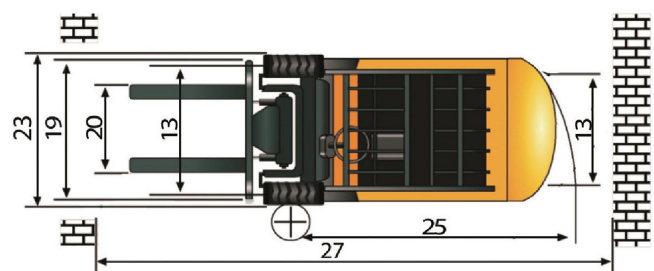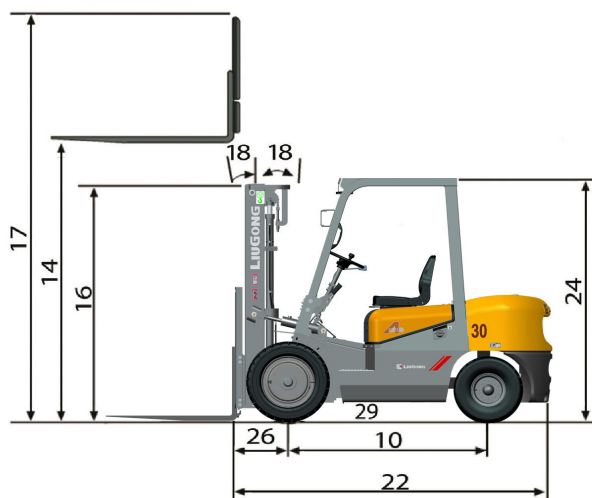

SPECIFICATION

General	Model	1				CPCD35	CPCD35
	Power Type	2				Diesel	GAS/LPG
	Base Capacity	3	@rated load center	kg		3,500	3,500
	Load Center	4		mm		500	500
Weights	Service Weight	5	unloaded	kg		4,430	4,430
	Axle Load	6	loaded / unloaded, front	kg		7,080 / 1,580	7,080 / 1,580
		7	loaded / unloaded, rear	kg		850 / 2,850	850 / 2,850
Tires	Tire Type	8				Pneumatic	Pneumatic
	Wheels	9	front / rear			2 / 2	2 / 2
	Wheelbase	10		mm		1,700	1,700
	Tire Size	11	front			28x9-15-14PR	28x9-15-14PR
		12	rear			6.50-10-10PR	6.50-10-10PR
Mast	Tread Width	13	front / rear			1,000 / 980	1,000 / 980
	Max. Fork Height	14	with std 2-stage mast	mm		3,000	3,000
	Free lift	15	with std 2-stage mast	mm		145	145
	Height, Upright Lowered	16	with std 2-stage mast	mm		2,080	2,080
	Height, Upright Extended	17	with std 2-stage mast	mm		4,146	4,146
	Mast Tilt, Fwd/Back	18	with std 2-stage mast	deg		6° / 12°	6° / 12°
	Carriage	19	width	mm		1,100	1,100
	Fork Spread	20	minimum / maximum	mm		272 / 1,072	272 / 1,072
	Fork Dimensions	21	T x W x L	mm		50 x 122 x 1,070	50x122x1,070
	Length to Fork Face	22	with std 2-stage mast	mm		2,748	2,748
Chassis	Overall Width	23		mm		1,225	1,225
	Overhead Guard Height	24		mm		2,170	2,170
	Turning Radius	25	minimum outside	mm		2,435	2,435
	Fork Overhang	26	with std 2-stage mast	mm		476	476
	Right Angle Stack	27	add load length and clearance	mm		4,176	4,176
	Ground Clearance	28	minimum loaded	mm		135	135
		29	center of wheelbase	mm		140	140
Performance	Travel Speed	30	loaded / unloaded	km/h	19 / 20	19 / 20	19 / 20
	Lift Speed	31	loaded / unloaded	m/s	0.43 / 0.45	0.43 / 0.45	0.43 / 0.45
	Lower Speed	32	loaded / unloaded	m/s	0.46 / 0.48	0.46 / 0.48	0.46 / 0.48
	Max. Drawbar Pull	33	loaded	kg	2,000	2,000	1,680
	Max. Gradeability	34	loaded / unloaded	%	18 / 20	20 / 20	20 / 20
Systems	Brakes	35	service		Foot / Hyd	Foot / Hyd	Foot / Hyd
		36	parking		Hand / Mech	Hand / Mech	Hand / Mech
	Engine	37	manufacturer		Xinchai	Cummins	Mitsubishi
		38	model		A498BT1	QSF2.8	S4S
		39	emission compliance		EU Stage IIIA	EU Stage IIIA	EU Stage IIIA
		40	cylinders		4	4	4
		41	displacement	liters	3.17	2.80	3.331
		42	rated power	kW/rpm	36.8 / 2,400	36.5 / 2,500	35.3 / 2,250
		43	Max. torque	N · m/rpm	186 / 1,800	190/1,300~1,500	177 / 1,700
							176.5 / 1,600

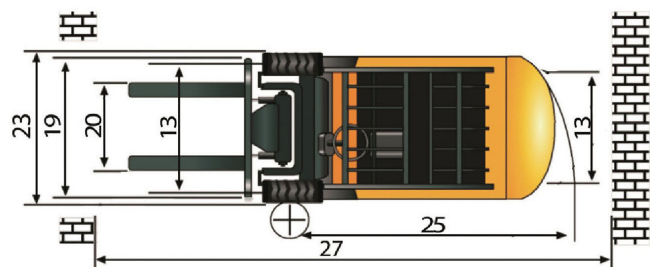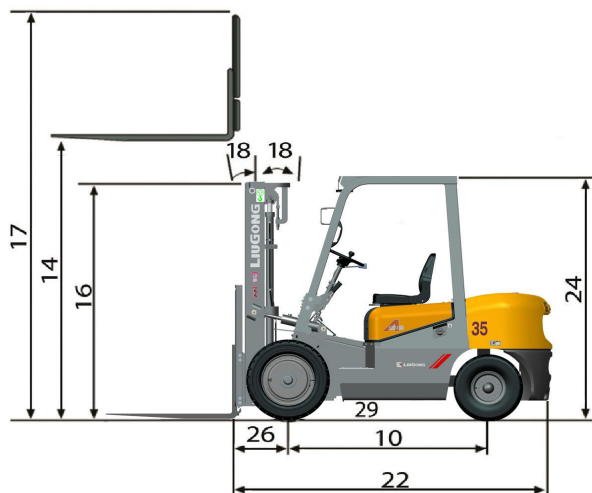


CAPACITY

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
					CPCD15	CPCD18	CPCD15	CPCD18	CPCD15	CPCD18
Standard 2-Stage	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
	3000	2030	135	6 / 12	1500	1800	1400	1700	2700	2920
	3300	2180	135	6 / 12	1500	1800	1400	1700	2715	2935
	3500	2280	135	6 / 12	1500	1800	1400	1700	2725	2945
	4000	2580	135	6 / 6	1500	1800	1350	1650	2756	2976
	4500	2830	135	6 / 6	1370	1670	1200	1500	2781	3001
	5000	3130	135	3 / 6	1100	1400	1000	1300	2806	3026

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
						CPCD15	CPCD18	CPCD15	CPCD18	CPCD15
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Full Free 2-Stage	3000	2030	1095	6 / 12	1500	1800	1400	1700	2720	2940

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
									CPCD15	CPCD18
Full Free 3-Stage	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
	3600	1730	790	6 / 6	1400	1700	1300	1600	3095	3725
	4500	2030	1095	6 / 6	1300	1600	1200	1500	3170	3760
	4800	2135	1200	6 / 6	1200	1500	1100	1400	3200	3780

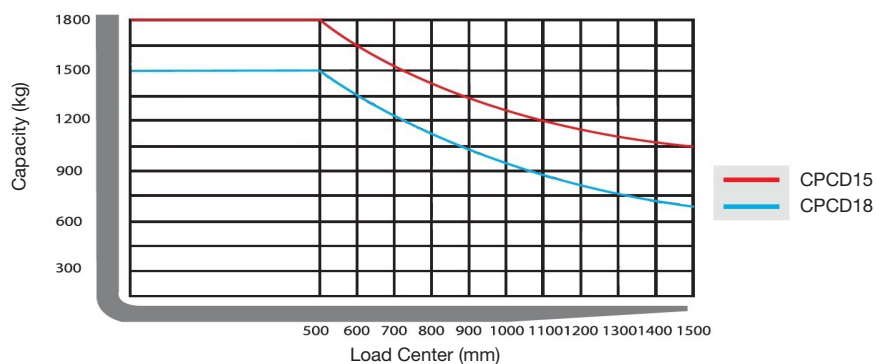

Note:


Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1000mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

CAPACITY

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
					CPCD20	CPCD25	CPCD20	CPCD25	CPCD20	CPCD25
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Standard 2-Stage	3000	2080	120	6 / 12	2000	2500	1850	2350	3355	3555
	3300	2190	120	6 / 12	2000	2500	1850	2350	3376	3576
	3500	2230	120	6 / 12	2000	2500	1850	2350	3390	3590
	4000	2630	120	6 / 6	2000	2500	1750	2300	3501	3701
	4500	2880	120	6 / 6	1920	2420	1650	2150	3606	3806
	5000	3130	120	3 / 6	1660	2160	1450	2050	3710	3910

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Freee Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
					CPCD20	CPCD25	CPCD20	CPCD25	CPCD20	CPCD25
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Full Free 2-Stage	2700	1930	830	6 / 12	2000	2500	1850	2350	3385	3585
	3000	2080	980	6 / 12	2000	2500	1850	2350	3406	3606

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
									CPCD20	CPCD25
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Full Free 3-Stage	3600	1820	660	6 / 6	1800	2300	1650	2150	3580	3780
	4000	1950	710	6 / 6	1800	2300	1650	2150	3615	3815
	4300	2050	760	6 / 6	1750	2200	1600	2050	3635	3835
	4500	2120	770	6 / 6	1700	2100	1550	1950	3655	3855
	4700	2190	820	6 / 6	1500	1600	1350	1600	3675	3875
	5000	2290	870	3 / 6	1500	1600	1250	1450	3825	4025

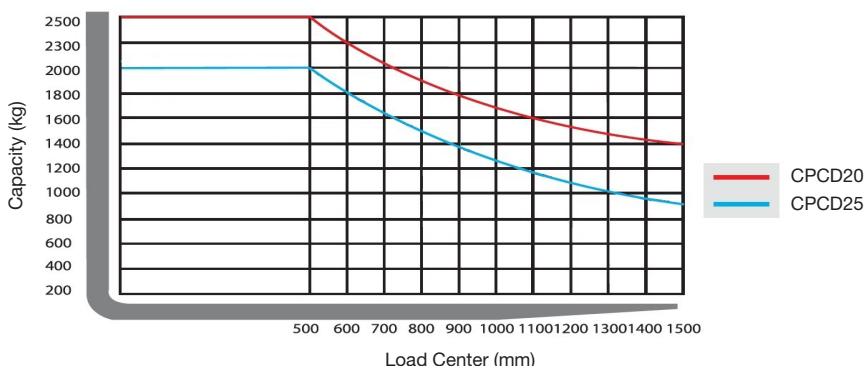

Note:


Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1000mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

CAPACITY

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Freee Lift with Load Backrest	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
					CPCD30	CPCD35	CPCD30	CPCD35	CPCD30	CPCD35
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Standard 2-Stage	3000	2120	145	6 / 12	3000	3500	2750	3250	4230	4430
	3300	2270	145	6 / 12	3000	3450	2750	3200	4255	4456
	3500	2370	145	6 / 12	2750	3250	2600	3100	4280	4479
	4000	2670	145	6 / 6	2600	3100	2500	3000	4370	4569
	4500	2920	145	6 / 6	2400	2900	2300	2800	4415	4613
	5000	3220	145	3 / 6	2200	2700	2100	2600	4460	4657
	5500	3670	145	3 / 6	2100	2600	2000	2500	4510	4710
	6000	4020	145	3/ 6	2000	2500	1900	2400	4555	4755

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
						CPCD30	CPCD35	CPCD30	CPCD35	CPCD30
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Full Free 2-Stage	3000	2120	964	6 / 12	3000	3500	2750	3250	4270	4470
	3500	2370	1214	6 / 12	2750	3250	2600	3100	4320	4519

Mast type	Maximum Fork Height (MFH)	Mast Overall Lowered Height (OAL)	Free Lift with Load Backrest*	Mast Tilt Angle (F/B)	Rated Load Capacity				Total Weight with Standard Forks	
					With Standard Forks		With Sideshifter			
						CPCD30	CPCD35	CPCD30	CPCD35	CPCD30
	mm	mm	mm	degree	kg @ (500mm LC)		kg @ (500mm LC)		Kg	
Full Free 3-Stage	3600	1815	659	6 / 6	2650	3150	2450	2950	4365	4655
	4000	1950	794	6 / 6	2450	2950	2250	2750	4400	4690
	4500	2120	964	6 / 6	2250	2750	2050	2550	4440	4730
	4700	2190	1034	6 / 6	2100	2600	1950	2350	4460	4750
	5000	2295	1134	3 / 6	1900	2400	1600	2100	4610	4900
	5500	2450	1304	3 / 6	1700	2200	1450	1950	4790	5080
	6000	2630	1474	3 / 6	1500	2000	1300	1800	4840	5130
	7000	3465	2245	3 / 3	-	1100	-	950	-	5190

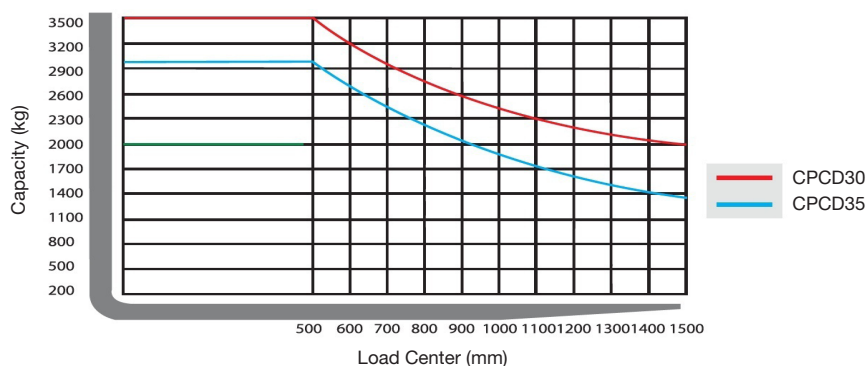

Note:

Vertical axle stands for load capacity while horizontal axle stands for load center, Load center is the distance counted from the front of the fork. The base point of the standard load is the center point of the cubic with the same 1000mm dimension in length, width and height. The load capacity should be down if mast tilt forward or using non-standard forks of loading goods with extra width. Please realize the different load capacity between different load centers according to load chart.

STANDARD CONFIGURATION

POWER SYSTEM

- Xinchai NC485BPG diesel engine (CPCD15-18)
- Xinchai A490BPG diesel engine (CPCD20-35)
- One-speed automatic transmission
- High strength drive axle
- Heavy duty steering axle
- Air filter with dual-elements
- Fuel system pre-filter
- Radiator
- Middle exhaust

HYDRAULIC SYSTEM

- 2-funtion hydraulic valve
- Hydrostatic steering
- Oil filter for intake and return
- Hydraulic oil radiator (CPCD30-35 only)

ELECTRIC SYSTEM

- 1 batteries
- Front flood lights
- Front steering lights
- Rear combination lights
- Buzzer for back off

UNDERCARRIAGE

- High strength frame
- 1 piece counterweight
- Tow pin
- Air filled pneumatic drive tires
- Air filled pneumatic steer tires

MAST

- 3.0M Standard 2-stage mast
- 970mm Wide Class II carriage (CPCD15-18)
- 1040mm Wide Class II carriage (CPCD20-25)
- 1100mm Wide Class III carriage (CPCD30-35)
- Load backrest
- 920mm long Class II pallet forks (CPCD15-18)
- 1070mm long Class II pallet forks (CPCD20-25)
- 1070mm long Class III pallet forks (CPCD30-35)

OPERATOR STATION

- Overhead guard
- Locks for engine hood
- Vinyl cushion seat with seat belt
- Ignition lock
- Display with alarms, fuel rate, water temperature, working hour
- Tilt steering column
- Inching, brake and accelerator pedals
- Hand parking
- Floor mat

OPTIONAL CONFIGURATION

POWER SYSTEM

- Yanmar 4TNE92 diesel engine (CPCD15-25)
- Mitsubishi S4S diesel engine (CPCD20-35)
- Cummins QSF 2.8 diesel engine (CPCD30-35)
- Nissan K21 engine (Gas/LPG) (CPCD15-18)
- Nissan K25 engine (Gas/LPG) (CPCD20-35)
- Elevated air pre-cleaner
- 2nd refined air filter
- Middle exhaust
- Vertical exhaust

HYDRAULIC SYSTEM

- 3-funtion hydraulic valve
- 4-funtion hydraulic valve

ELECTRIC SYSTEM

- Rear working light
- Amber warning light
- License plate light

UNDERCARRIAGE

- Solid pneumatic drive tires
- Solid pneumatic steer tires

MAST

- Full free 2-stage mast
- Full free 3-stage mast
- Longer Class II or III pallet forks

OPERATION STATION

- Enclosed cabin
- Heater for cabin
- Operator fan
- Cup holder

- Fire extinguisher
- Expansion tank
- Anti-corrosion lifting and tilting cylinde
- Protective cover for tilt cylinde
- Oil-water separator (for Xinchai engine only)
- Master key
- Hydraulic electronic shifting
- Electronic of power off (for Xinchai engine only)
- Half-suspension vinyl seat(tiancheng)
- Grammer full-suspension vinyl seat

WE MAKE IT EASY FOR YOU



EASY TO OWN



EASY TO CONTROL



EASY TO SERVICE



EASY TO MAINTAIN

OPTIONS TO ENHANCE YOUR PRODUCTIVITY



CABIN



2ND REFINED AIR FILTER



DUAL TIRES



FULL FREE 3 STAGE MAST



LOAD STABILIZER



BUCKET



LIFTING HOOK



BALE CLAMP



CARTON CLAMP