




Working Height Max.	22.2 m (72'10")
Horizontal Reach Max.	12.6 m (41'4")
Up And over Clearance Max.	8.3 m (27'3")
Overall Lift Capacity Max.	260 kg (573 lb)
Overall Width and Length	2.42 m x 8.87 m (7'11" x 29'1")

LA20JE

Articulated Boom Lifts-Electric Drive

TOUGH WORLD. TOUGH EQUIPMENT.

LA20JE SPECIFICATIONS >>>

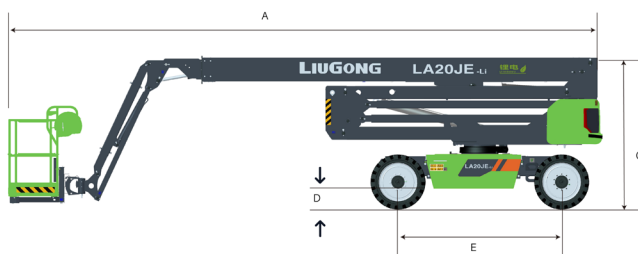

DIMENSIONS

Working Height Max.	22.2 m (72'10")
Platform Height Max.	20.2 m (66'3")
Operating Amplitude Max.	13.2 m (43'3")
Horizontal Reach Max.	12.6 m (41'4")
Up And Over Clearance Max.	8.3 m (27'3")
Platform Size (LxWxH)	1.83 x 0.76 x 1.1m (6' x 2'6" x 3'7")
A. Length (Stowed/Transport)	8.87 m (29'1")
B. Width (Stowed/Transport)	2.42 / 2.29 m (7'11" / 7'6")
C. Height (Stowed/Transport)	2.32 / 2.2 m (7'7" / 7'3")
D. Ground Clearance	0.31 m (1')
E. Wheelbase	2.5 m (8'2")

PRODUCTIVITY

Overall Lift Capacity Max.	260 kg (573 lb)
Platform Occupancy Max.	2
Platform Rotation	± 90°
Jib Length	1.85 m (6')
Vertical Jib Rotation (Up/Down)	-65° ~ +70°
Turntable Rotation	360° Continuous
Turntable Tailswing (Boom Raised/Stowed)	0 / 0.72 m (0 / 2'4")
Drive Speed (Stowed)	5 km/h (3.1 mph)
Drive Speed (Raised)	0.6 km/h (0.4 mph)
Gradeability	45 %
Tilt Sensor Activation (Front to Back/Side to Side)	X 5° / Y 5°
Turning Radius (Inside/Outside)	2.4 / 5.5 m (7'10" / 18')
Tire Size (Solid Off-road)	33 x 12 -20
Drive Steering Type	4WD x 2WS

WEIGHT

Overall Weight	9,500 kg (20,943 lb)
----------------	----------------------

POWER

Battery (Lithium)	48 V / 460 Ah
Charger	48 V / 60 A
Lifting Motor	AC 10 kW
Drive Motor	AC 3.3 kW
Auxiliary Power Unit	12 V / DC
Hydraulic Tank Capacity	93 L (24 gal)

LA20JE Working Range

