



|                                   |                                  |
|-----------------------------------|----------------------------------|
| <b>Working Height Max.</b>        | 34.2 m (112'2")                  |
| <b>Operating Amplitude Max.</b>   | 20.9 m (68'7")                   |
| <b>Overall Lift Capacity Max.</b> | 300 / 454 kg                     |
| <b>Overall Width and Length</b>   | 2.49 x 12.8 m<br>(8'2" x 41'11") |

## **LT32J**

# **Telescopic Boom Lift-Diesel**

**TOUGH WORLD. TOUGH EQUIPMENT.**

# LT32J SPECIFICATIONS >>>

## DIMENSIONS

|                              |                                             |
|------------------------------|---------------------------------------------|
| Working Height Max.          | 34.2 m (112'2")                             |
| Platform Height Max.         | 32.2 m (105'7")                             |
| Operating Amplitude Max.     | 20.9 m (68'7")                              |
| Platform Size (LxWxH)        | 2.4 x 0.9 x 1.1 m<br>(7'10" x 2'11" x 3'7") |
| A. Length (Stowed/Transport) | 12.8 / 11.7 m (41'11" / 38'5")              |
| B. Width (Stowed/Transport)  | 2.49 / 2.25 m (8'2" / 7'5")                 |
| C. Height (Stowed/Transport) | 2.9 / 2.66 m (9'6" / 8'8")                  |
| D. Ground Clearance          | 0.33 m (1')                                 |
| E. Wheelbase                 | 3 m (9'10")                                 |

## PRODUCTIVITY



|                                   |                               |
|-----------------------------------|-------------------------------|
| Overall Lift Capacity Max.        | 300 / 454 kg                  |
| Platform Occupancy Max.           | 2                             |
| Platform Rotation                 | ± 90°                         |
| Vertical Jib Rotation (Up/Down)   | - 60° ~ + 75°                 |
| Turntable Rotation                | 360° Continuous               |
| Turntable Tailswing (Boom Stowed) | 1.49 m (4'11")                |
| Drive Speed (Stowed)              | 5 km/h (3.10 mph)             |
| Drive Speed (Raised)              | 0.6 km/h (0.37 mph)           |
| Gradeability                      | 45 %                          |
| Tilt Sensor Activation            | X 5° / Y 5°                   |
| Turning Radius (Inside/Outside)   | 3.6 / 6.7 m (11'10" / 21'12") |
| Tire Size (Foam Filled)           | 18 - 625                      |
| Drive Steering Type               | 4WD x 2WS                     |

## WEIGHT

|                |           |
|----------------|-----------|
| Overall Weight | 17,500 kg |
|----------------|-----------|

## POWER

|                         |                                |
|-------------------------|--------------------------------|
| Diesel Engine           | YuChai YCF3075-T480/55.8 kW G4 |
| Diesel Tank Volume      | 150 L                          |
| Hydraulic Tank Capacity | 170 L                          |

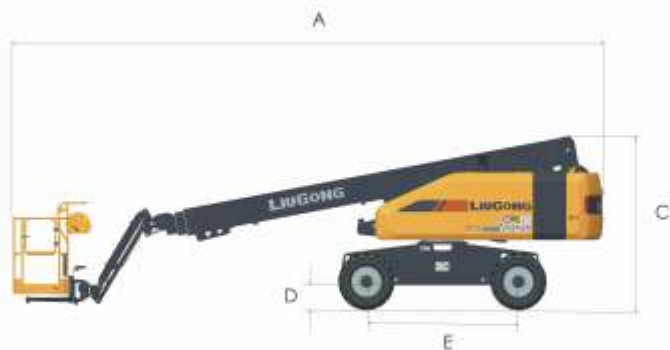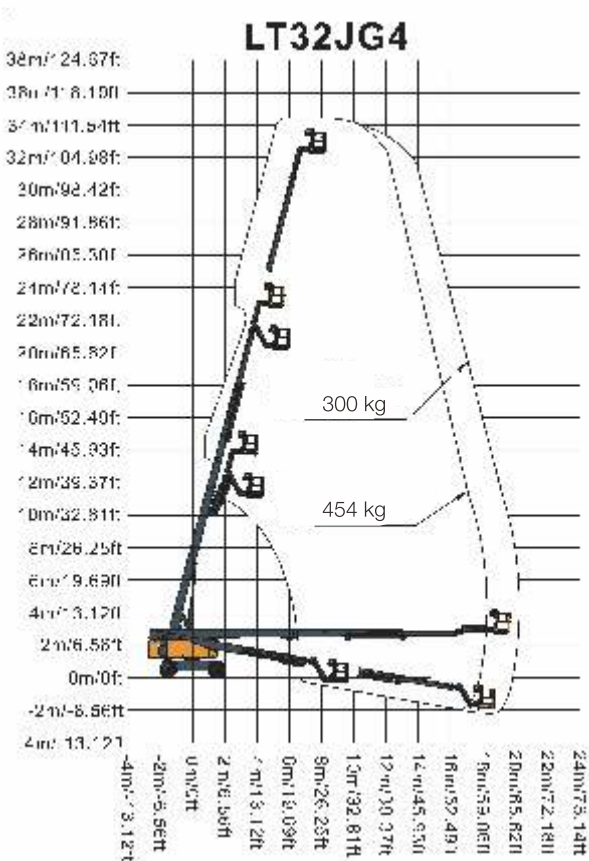

**Corporate office**  
**LiuGong India Pvt. Ltd.**  
101, Okhla Industrial Estate, Phase III  
New Delhi- 110020  
Tel.: 011- 47272200  
www.liugong.com  
liugongindia.com

**Plant Address:**  
Plot No. 163, Industrial Area,  
Sector - III, Pithampur,  
Dist. - Dhar, Madhya Pradesh - 454774  
Tel.: 07292-416700

**LIUGONG CARE**  
**1800 1033 852**

06/2025 LIPL