LiuGong

BUILT IN BHARAT

Excellence Series

Engine	Cummins QSB7
Gross Power	188 hp @ 2050 rpm
Bucket Capacity	0.5 m^3
Digging Depth	17,209 mm
Operating Weight	30,200 kg
Cabin	Air Conditioned

930E XLR EXCAVATOR

TOUGH WORLD. TOUGH EQUIPMENT.

930E XLR SPECIFICATIONS >>>

ENGINE

Make	CUMMINS
Engine Model	QSB7
Gross Power	188 hp @ 2,050 rpm
Peak Torque	800 N·m @ 1,200 rpm
Number of Cylinders	6
Displacement	6.7 L
Aspiration	Tourbocharged

HYDRAULIC SYSTEM

Main Pump	
Main Pump Type	Two Variable Displacement Piston Pumps
Maximum Flow	2 x 240 LPM
Main Pump	
Type	Gear Pump
Maximum Flow	19 LPM
Relief Valve Setting	
Implement	34.3/37.3 MPa
Travel Circuit	34.3 MPa
Swing Circuit	28.5 MPa
Pilot Circuit	3.9 MPa

SWING SYSTEM

Swing Speed	12 rpm
Swing Torque	80, 00 N·m
Swing Motor	Axial Piston Motor
Swing Reduction	Planetary Gear
Swing Bearing	Lubrication Grease Bathed

TELEMATICS

I-Link (GPS)	Available

BUCKETS

Bucket	0.5 m³

UNDERCARRIAGE

Center Frame	X-Plate
Track Frame	Box Type
Track Shoe Each Side	51
Shoe Width, Triple Grouser	800 mm
Bottom Rollers Each Side	9
Top Rollers Each Side	2

SERVICE CAPACITIES

Fuel Tank	540 L
Engine Oil	25 L
Final Drive	3.5 Lx2
Cooling System	30 L
Hydraulic System Total	342 L
Swing Device	4.4 L
Hydraulic Reservoir	210 L

DRIVE SYSTEM

Drive Motor	Axial Piston Motor
Drive Reduction	Planetary Gear
Travel Speed (High/Low)	(5.1/3.3) Km/h
Gradeability	70%) (35°)

ELECTRICAL SYSTEM

Voltage	24 V
Battery	12 V, 120Ah x2
Working Lights	5

OPERATING WEIGHT

Operating Weight	30,200 kg

WORKING RANGE

Boom	11,350 mm
Arm	9,550 mm
A. Max. Digging Reach	20,882 mm
B. Max. Digging Reach on Ground	20,803 mm
C. Max. Digging Depth	17,209 mm
D. Max. Cutting Height	15,573 mm
E. Max. Dumping Height	14,305 mm
F. Min. Front Swing Radius	6,522mm

WORKING DIMENSIONS (Reference Bucket - 0.5 m³)

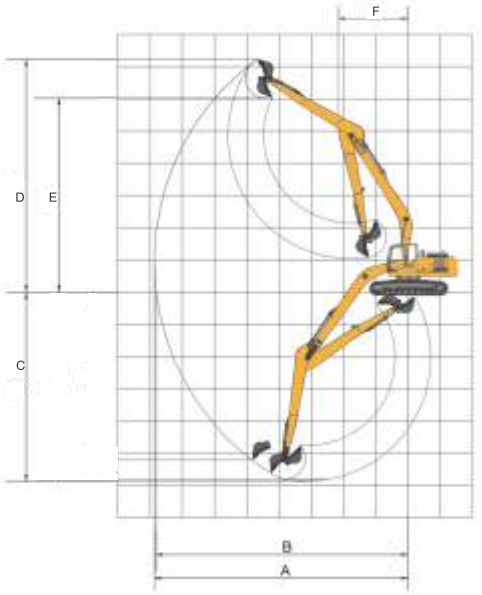

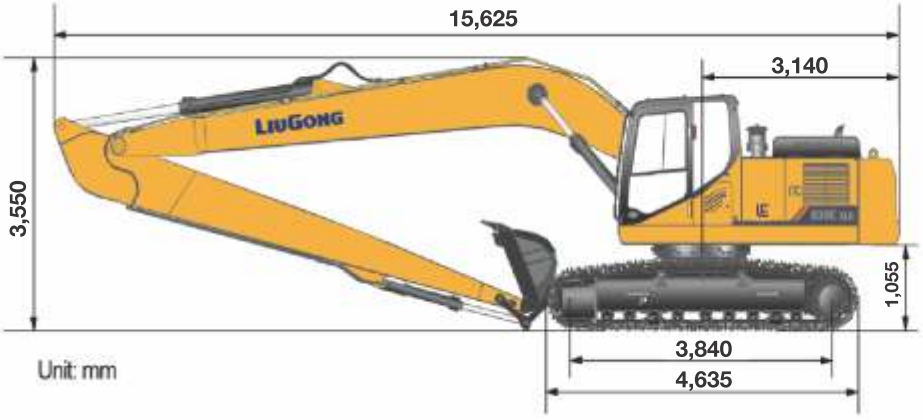

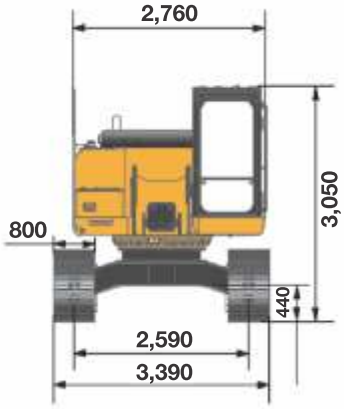

LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.

* Items shown as Optional.Availability on demand

Corporate office
LiuGong India Pvt. Ltd.
101, Okhla Industrial Estate, Phase III
New Delhi- 110020
Tel.: 011- 47272200
www. liugong.com
india@liugong.com

Plant Address:
Plot No. 163, Industrial Area,
Sector - III, Pithampur,
Dist. - Dhar, Madhya Pradesh - 454774
Tel.: 07292-416700

LIUGONG CARE
1800 1033 852

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

11/2024 LIPL